

# PRODUCT SPECIFICATION

**Model No.: CSDM-58100X CSDM-58101X**

Descriptions:
<ul style="list-style-type: none"> <li>■ 1.4 Inch Dot-Matrix Display</li> <li>■ 5*8 Array with X-Y Select</li> <li>■ CSDM-58100 is Common Column Cathode</li> <li>■ CSDM-58101 is Common Column Anode</li> <li>■ Emitting Color: Pure Green; Yellow Green; Yellow; Amber; Orange; Red; Deep Red</li> <li>■ Standard: -11: Gray face, white Dot. -21: Black face, white Dot.</li> </ul>



CUSTOMER APPROVED SIGNATURES	APPROVED BY	CHECKED BY	PREPARED BY

**OPTO PLUS TECHNOLOGIES CO.,LTD**  
 Address:No.696,Yangming North Rd,  
 ShaoXing City,ZheJiang Province, P.R.China.  
 Tel :86-575-88623888  
 Fax:86-575-88623112

**Model No.: CSDM-58100X CSDM-58101X**


**■ Features -**

1. 1.4 inch (35.9mm) Matrix height.
2. Case mold type.
3. RoHS compliant.
4. Low power consumption.
5. Easy mounting on P.C. board or socket.


**■ Device Selection Guide -**

Model No.	Chip	
	Material	Emitting Color
CSDM-5810x2	InGaN  AlGaNP	Pure Green
CSDM-5810xM		Yellow Green
CSDM-5810xT		Yellow
CSDM-5810xA		Amber
CSDM-5810xV		Orange
CSDM-5810xL		Red
CSDM-5810xU		Deep Red

**■ LED Numeric/Alphanumeric Display**

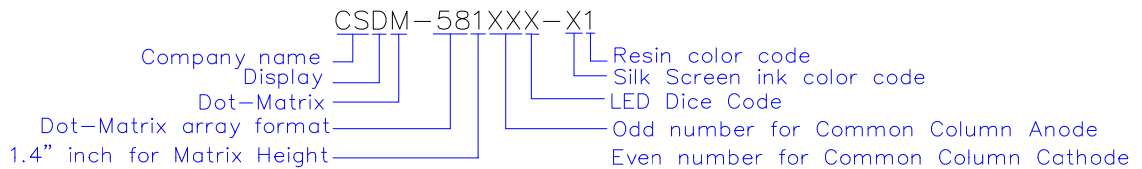

**■ Mechanical Dimensions -**

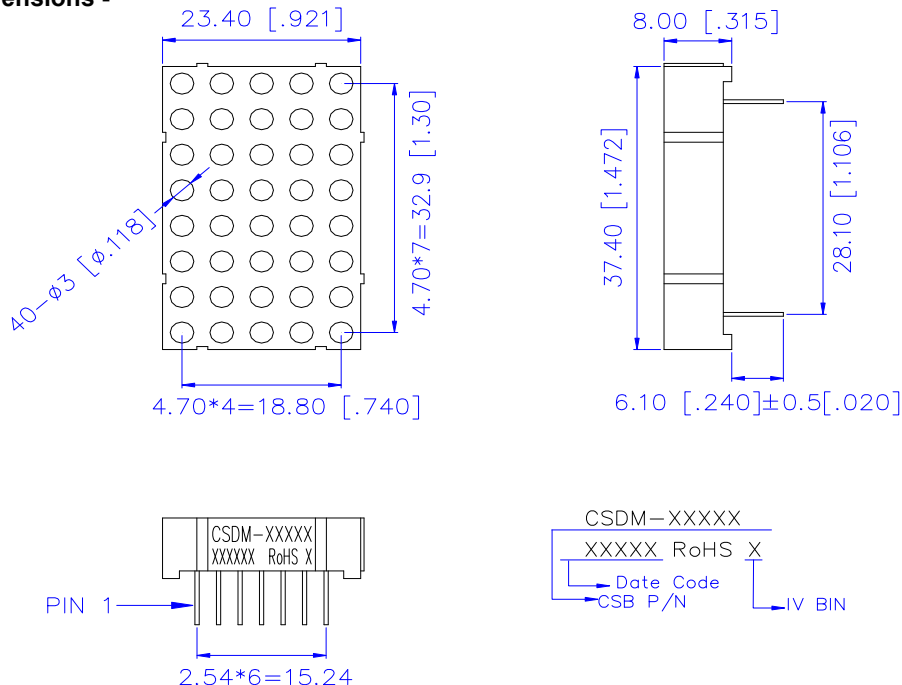


**Notes:**


1. All pins are  $\phi 0.50 [0.020] \pm 0.1 [0.004]$
2. Dimension in millimeter [inch], tolerance is  $\pm 0.25 [0.010]$  and angle is  $\pm 1^\circ$  unless otherwise noted.
3. Bending  $\leq$  Length\*1%.

Model No.: CSDM-58100X CSDM-58101X


■ All Light On Segments Feature & Pin Position

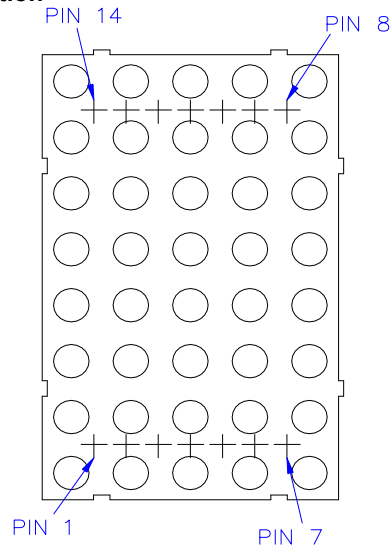

■ Internal Circuit Diagrams -

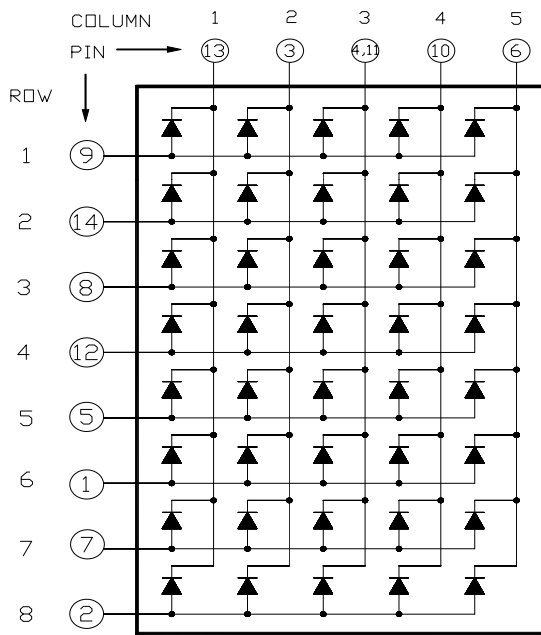

CSDM-58100 is Common Column Cathode

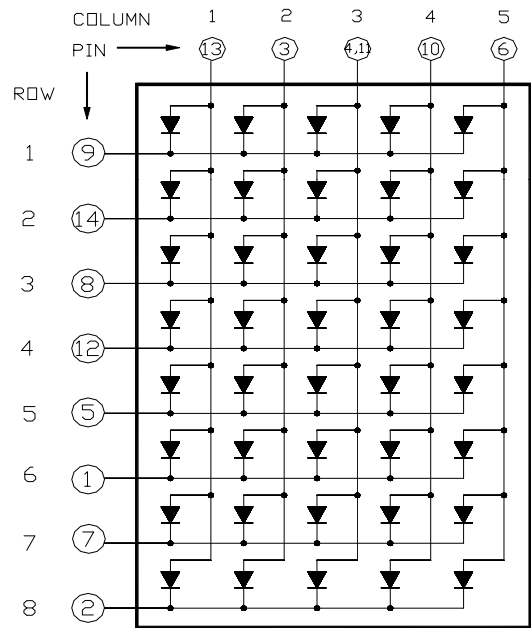

CSDM-58101 is Common Column Anode

Model No.: CSDM-58100X CSDM-58101X

■ Absolute Maximum Rating -

(Ta=25°C)

Parameter	Symbol	Rating		Unit
		M/T/A/V/L/U	2	
Power Dissipation Per Dice	P <sub>AD</sub>	70	114	mW
Derating Liner from 25°C per Dice	-	0.33	0.4	mA/°C
Continuous Forward Current Per Dice	I <sub>AF</sub>	25	30	mA
Peak Current Per Dice(duty cycle 1/10,1KHz)	I <sub>PF</sub>	90	100	mA
Reverse Voltage Per Dice	VR	5	5	V
Electrostatic discharge(HBM)	ESD	/	1000	V
Operating Temp.	T <sub>opr</sub>	-35 ~ +85		°C
Storage Temp.	T <sub>stg</sub>	-35 ~ +85		°C
Hand Soldering Temp.	T <sub>sol</sub>	350		°C

■ Electro-optical Characteristics -

(Ta=25°C)

Parameter	Symbol	Chip	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity Per Segment	I <sub>v</sub>	2	-	250	-	mcd	IF=10mA
		M	-	20	-		
		T	-	60	-		
		A	-	60	-		
		V	-	40	-		
		L	-	40	-		
		U	-	26	-		
Forward Voltage Per Segment	VF	2	-	3.2	3.8	V	IF=20mA
		M/T/A/V/L/U	-	2	2.8		
Peak Emission Wavelength / Dominant Wavelength	λ <sub>P</sub> /λ <sub>d</sub>	2	-	*/525	-	nm	IF=20mA
		M	-	572/570	-		
		T	-	592/590	-		
		A	-	612/605	-		
		V	-	632/625	-		
		L	-	644/630	-		
		U	-	660/645	-		
Reverse Current	I <sub>R</sub>		-	-	100	μA	VR=5V
Luminous Intensity Matching Ratio	IV-m		-	-	2:1	-	*1

Notes: \*1 Condition is I<sub>p</sub>=80mA 1/16Duty

■ Electrical / Optical Characteristics Curves -

(Ta = 25°C Unless Otherwise Noted)

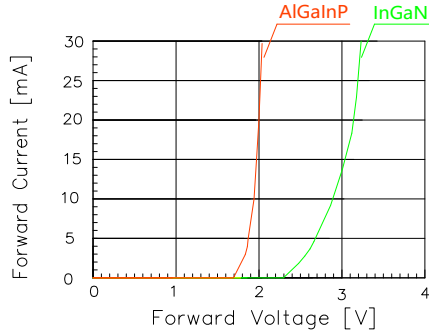


Fig 1. Forward Current vs. Forward Voltage

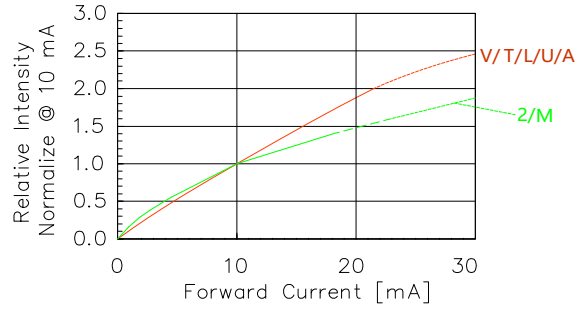


Fig 2. Relative Intensity vs. Forward Current

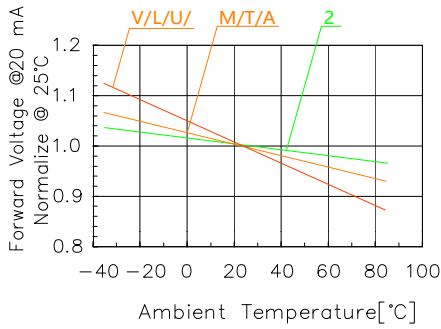


Fig 3. Forward Voltage vs. Temperature

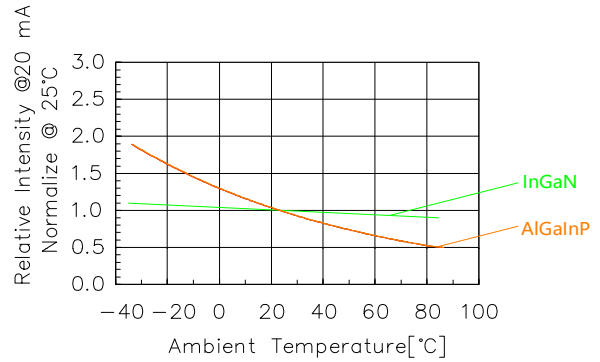


Fig 4. Relative Intensity vs. Temperature

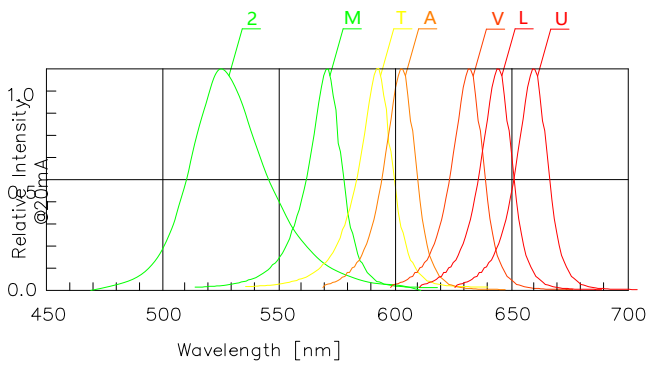


Fig 5. Relative Intensity vs. Wavelength

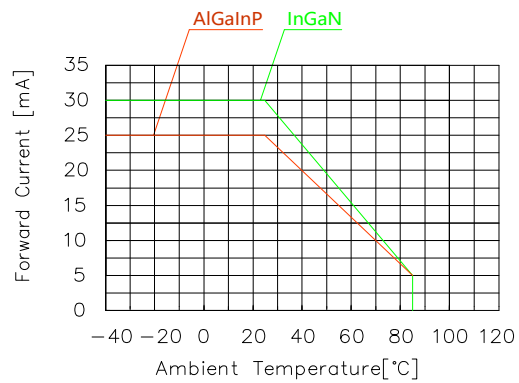


Fig 6. Forward current vs. Temperature


**Model No.: CSDM-58100X CSDM-58101X**

**■ Precautions For Use -**

**1.Wave Soldering Profile**

Distance:1.6mm min(From seating plane)

Item	Condition		Note
Preheat	Temperature T1	80 – 120°C	PWB temperature (Soldering side surface)
	Time t1	60 – 180sec	
Solder Dip	Temperature T2	230 – 260°C	Bath temperature
	Time t2	2 – 4sec	Solder tank passage time

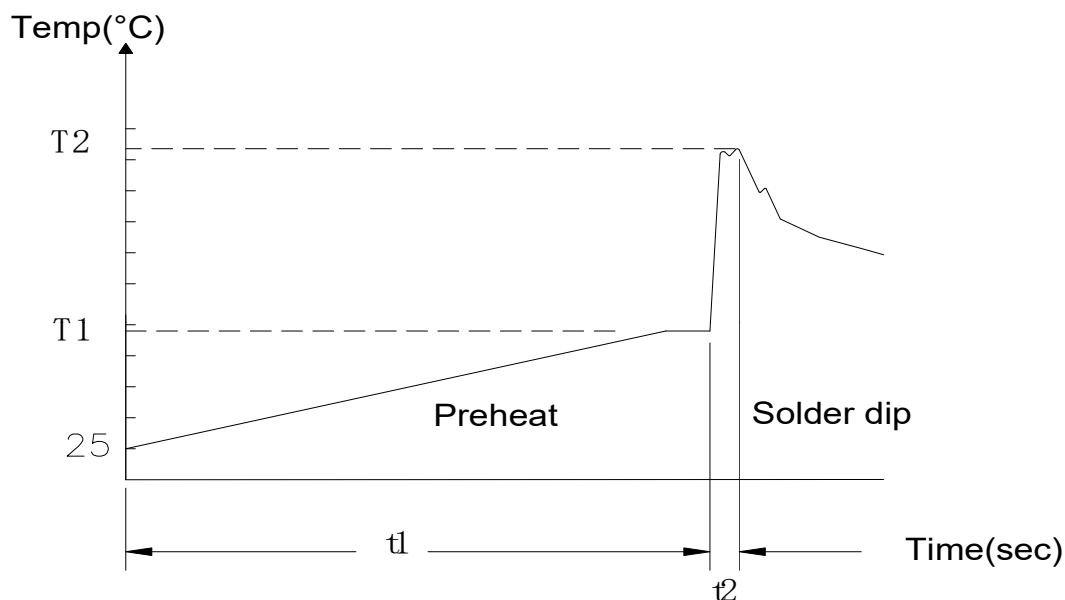

**2.Hand Soldering (Iron Condition)**

Soldering Iron:30W Max

Temperature 350°C Max

Soldering Time:3 Seconds Max(One Time)

Distance:1.6mm min(From seating plane)